

# DATA SHEET

## EV PORTABLE

### General characteristics

e-Charger: EV Portable

Colour: White

Material: ABS Plastic


Weight: 3 kg

Display: 7"

Operating temperature: from -10° to 45°

Storage temperature: from -40° to 50°

### Dimensions

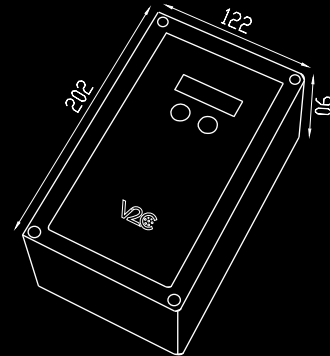

### Electrical characteristics

Connector type: Schuko / CETAC industrial

Grid type: 230V / 400V

Maximum recharging intensity: 16A / 32A

High power portable e-Charger

Maximum recharging power: 3,6 kW / 7,4kW / 22kW

Configurable current: from 6A to 32A

Nominal frequency: 50Hz / 60Hz

Protection index: IP54 / IK10

### Functional characteristics

Unit configuration:

Selection of the maximum recharging current up to 32A

Selection amps one at a time

### Composition of the product number

Model		EVP2
Intensity	16	16
	32	32
Network type	Single-phase	1F
	Three-phase	3F
Connector	Schuko	SC
	CEE Industrial	Ø

### **EVP2-32-1F**

